

Virtual Spout

The High-Flow Virtual Spout offers a very discreet alternative to the traditional filler spout. It is factory-installed on an inside wall of the tub and is “stubbed-out” under the tub with 3/4" copper pipe so a plumber can tie the incoming water to the port. Fill rate is 20 GPM at 45 PSI with Wilkins Dual Check Valve installed. See below for more information.

Because the Virtual Spout is installed below the water level of the tub, special consideration is needed to prevent backflow into the fresh water supply. The Virtual Spout will always come with a Wilkins Dual Check Valve installed on the system (Figure 1). Some areas of the country require additional backflow prevention above the water line of the tub. An atmospheric vent suitable for in-wall installation (Acme In-Wall Vent) comes with the purchase of the Virtual Spout, but requires access through the wall and a means of catching any spilled water, should the atmospheric vent be activated (Figure 2). Please check local codes, as some areas of the country require a deck-mounted backflow prevention device.



The Virtual Spout cannot be combined with MTI's Fill-Flush cleaning system.

Please review the Owner's Manual / Installation Guide provided with tub for complete installation instructions. The manual is also available at mtibaths.com.

Please indicate desired location on spec sheet when ordering.



Virtual Spout

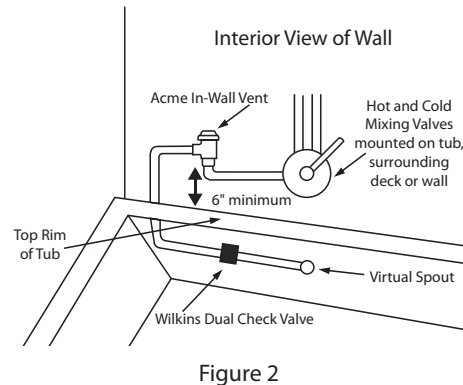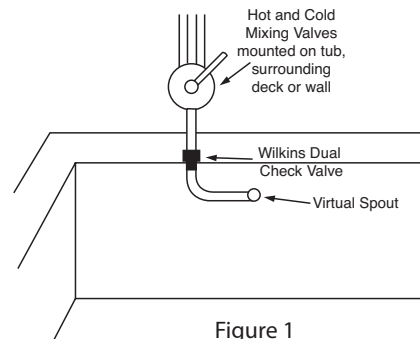

Virtual Spout (FPMJ) \$310